



AK-Series AK48-2-STD-UB and AK48-2-STD-UB-D

Plug-in power.

The AK-Series is all-new and the options are endless on this commercial utility truck. Available in two bed sizes and with a load capacity of up to 900 lbs. Featuring and automotive-grade cab with optional doors, digital dash display and comfortable bucket seats. The AK-Series is customizable to your every application need.

Featuring utility box, bed and fold-down tailgate.

Available with doors, open, or with sunbrella enclosure.



- Eight 6 V (48 V) batteries
- 2 passengers with bucket seats
- 7.0 HP AC Motor
- 450 A (48 V) Curtis programmable controller with regenerative braking
- Automotive windshield (DOT, AS1) with windshield wiper
- Battery level indicator
- Towing capacity of 3,000 lbs
- Horn, reverse beeper, parking brake
- 2" towing receiver
- 12" aluminum wheels
- 30 A, 48 V to 12 V voltage reducer for all accessories
- Deluxe stereo and CD player with two speakers
- Four-wheel hydraulic brakes
- 660 lbs cargo load capacity
- 19.5 mph top speed (20-25 mph with LSV option)
- Box Dimensions: 48"L x 46.5"W x 10"H
- Dimensions: 122"L x 57"W x 73.6"H
- US-made DPI Automatic charger

Options

- Heavy duty sunbrella enclosure
- LSV (NEV) Street Legal Package
- Amber or LED strobe light
- AGM batteries
- Extended warranty options
- Heater and defroster
- Self-sealing tires
- Aluminum ladder rack
- Lester on-board charger

WHITE

Default color.

Custom colors available.
Allow 12 weeks lead time.

Specifications for AK48-2-STD-UB and AK48-2-STD-UB-D*

| | |
|-------------------------------|--|
| Passengers | 2 |
| Battery System | 8x6 V, Trojan T-105 |
| Motor Power | 7.0 HP AC Motor |
| Controller Power | 450 A, Curtis AC controller |
| Top Speed | 19.5 mph, up to 45 mile range |
| Total Load Capacity | 990 lbs |
| Cargo Capacity | 660 lbs |
| Vehicle Dimensions | 122"L x 57"W x 73.6"H |
| Box Dimensions | 48"L x 46.5"W x 10"H |
| Weight with Batteries | 1750 lbs (no doors), 1900 lbs (doors) |
| Ground Clearance | 5" |
| Turning Radius | 14.7 ft |
| Wheel Base | 88" |
| Top Climbing Grade | 15% (loaded) |
| Front Suspension | Independent, coil over shock |
| Rear Suspension | Leaf spring and shock |
| Steering System | Rack and pinion |
| Brake System | Four-wheel hydraulic drum brake |
| Rear End Gear Ratio | 12.49:1, Enclosed internally lubricated differential/transaxle |
| Tire Size | 23x8.5-12 All-terrain tire |
| Tire Pressure | 14 psi |
| Wheel Type | 12" aluminum |
| Towing Capacity | 3,000 lbs |
| Chassis | Steel frame |
| Body Material | Fiberglass |
| Drive Train | Rear direct drive |
| Voltage Reducer | 30 A, 48V to 12 V included |
| Windshield | As1, DOT automotive windshield |
| Headlights, Taillights | Included |
| LED Indicators | Included |
| Brake Lights, Turning Signals | Included |
| Horn, Reverse Beeper | Included |
| Seat Belts | 3- or 2-point seat belts (doors, w/o doors) |
| Amp Meter, Battery Indicator | Included |
| Odometer, Speedometer | Included |
| Emergency Light Switch | Included |
| Parking Brake | Included, hand-activated |
| GVWR | 2,900 lbs |
| Warranty | Two year bumper-to-bumper warranty, less wear items |

*Specs are subject to change without notification.


Features



Fold-down tail gate;
optional fold-down side rails



Front dash, roomy interior

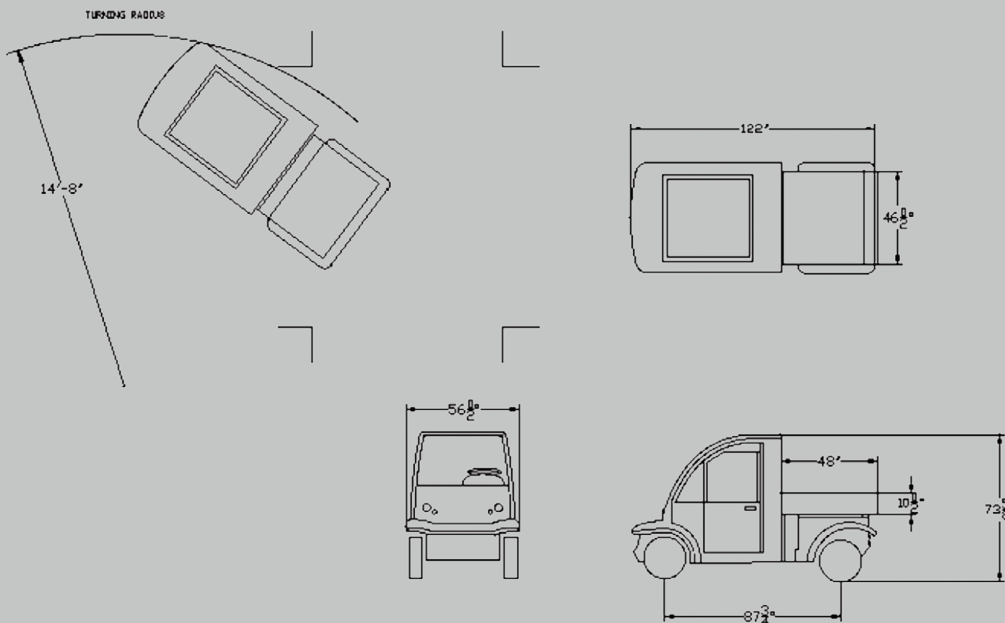

Your Local STAR EV Dealer:

Golf Carts of Central Florida
407-657-1108